

# 1 colson SERIES


Capacity up to 75 lbs each

www.colsoncaster.com

## Standard Features

- Zinc plated finish is attractive and durable
- Full double ball hardened raceways for better performance and greater durability
- 5/16" shouldered axle with 1/4" nut
- "Colson 45" multi-temp grease lubricates in extreme hot and cold temperatures

## Small Top Plate Swivel & Rigid

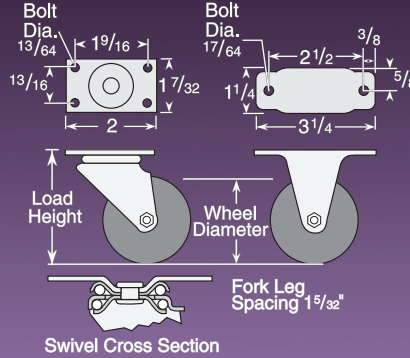

## Performance Options

### Caster Brake

**Side Lock** (See page 12)  
Available on all 3" swivel models. Field installable (Specify **BRK3**).

### Fork Option

**NSF Listed** (See page 3)  
All models except thread guards (Specify **FSI**).



### Wheel Option

**Thread Guards** – Available on many models. Brake & NSF options cannot be used with thread guards (Specify **TG1** for metal **TG2** for plastic).

### Standard Mounting:

Rigid caster mounting holes do not match swivel.

## Wheel Selection



PERFORMA  
FLAT TREAD



POLYOLEFIN



POLYURETHANE  
HI-TECH



CUSHION  
RUBBER



HARD  
RUBBER

## 1 SERIES • Small Top Plate Swivel & Rigid • Capacity up to 75 lbs

Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Swivel Caster Models	Rigid Caster Models	Load Height	Swivel Radius	Weight (Pounds)
1 5/8"	7/8"	60	Performa Rubber	Delrin	1.01666.441	1.01610.441	29/16	13/4	3/8
		75	Polyolefin	Delrin	1.01666.52	1.01610.52	29/16	13/4	3/8
2"	7/8"	75	Performa Rubber	Delrin	1.02266.441	1.02210.441	23/4	115/16	1/2
			Polyolefin	Delrin	1.02266.52	1.02210.52	23/4	115/16	1/2
			Cushion Rubber	Ball	1.02266.45	1.02210.45	23/4	115/16	1/2
			Hard Rubber	Ball	1.02266.55	1.02210.55	23/4	115/16	1/2
3"	7/8"	75	Performa Rubber	Delrin	1.03066.441	—	37/8	29/16	3/4
			Polyurethane HI-TECH	Delrin	1.03066.91	—	37/8	29/16	3/4
			Polyolefin	Delrin	1.03066.53	—	37/8	29/16	3/4

1 SERIES